

**VERSATEMP™**  
HEAT / CHILL PUMP



Jandy®

# HEAT. CHILL.

## Perfect Comfort.

**NOW WITH 160K BTUS**



OFFICIAL  
POOL  
EQUIPMENT  
SPONSOR



**VERSATEMP™**  
HEAT/CHILL PUMP

## Now with 160K BTUs for 40% Faster Heat & Chill

Meet the powerful VersaTemp™ Heat/Chill Pump, now with up to 160K BTUs. Heat or chill your pool and spa up to 40% faster\* while keeping energy costs in check. No costly installs. No loud, disruptive noise. Just powerful, efficient comfort all year round.



### More Power. Faster Heat.

Now available with 160K BTUs to deliver up to 40% faster\* heating

### Power Defrost

Activates heat reversing technology to maintain reliable performance in cooler temperatures



### High-Capacity Cooling Power

When hot days push pool temps too high, especially in desert and tropical climates, VersaTemp brings it down fast

### Cold Plunge Ready

Cool your plunge pool or spa down as low as 40°F



\*When compared to 110K BTU model


## SoundShield™ Technology

You don't have to sacrifice heating power for lower noise. VersaTemp keeps sound levels down with a swept-wing blade design and decibel dampening acoustic blanket



## Skip the Costly Panel Upgrade

No need to upgrade your electrical panel—160K BTU unit runs on a 50 amp breaker

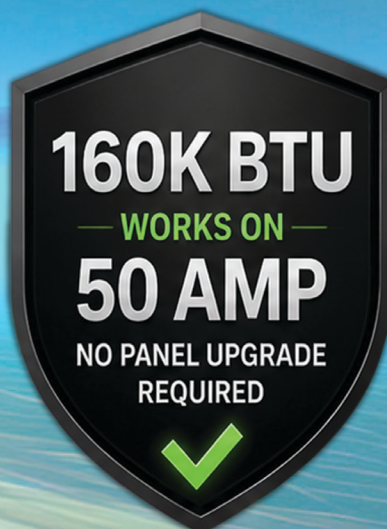

## Anytime, Anywhere Control

Enjoy the convenience of on-the-go operation with the iAquaLink app.



**iAquaLink**


Over 50K 5-star reviews!



## SPECIFICATIONS

|                             | JRT2000R       | JRT2500R       | JRT3000R       | JRT4001R                   | JRT3000R3            |
|-----------------------------|----------------|----------------|----------------|----------------------------|----------------------|
| Output (BTU)                | 103,000        | 116,000        | 130,000        | 160,000                    | 130,000              |
| Input (kWH)                 | 4.72           | 5.23           | 6.57           | 7.95                       | 6.20                 |
| COP                         | 6.4            | 6.5            | 5.8            | 5.9                        | 6.1                  |
| Output (BTU)                | 96,000         | 109,000        | 124,000        | 148,000                    | 124,000              |
| COP                         | 6.1            | 6.1            | 5.6            | 5.7                        | 5.9                  |
| Output (BTU)                | 62,000         | 70,000         | 82,000         | 101,000                    | 85,000               |
| COP                         | 4.1            | 4.1            | 4.0            | 4.4                        | 4.4                  |
| Voltage                     | 208V-230V/60Hz | 208V-230V/60Hz | 208V-230V/60Hz | 208V-230V/60Hz             | 208V/60Hz<br>3-Phase |
| Minimum Circuit Ampacity    | 38             | 39             | 40             | 50 @ 230VAC<br>55 @ 208VAC | 40                   |
| Max Over Current Protection | 40             | 50             | 50             | 70                         | 50                   |
| LRA                         | 178            | 182            | 182            | 198                        | 179                  |
| RLA                         | 28.3           | 29             | 32.5           | 42                         | 33                   |
| Compressor                  | Scroll         |                |                |                            |                      |
| Optimal Water Flow (GPM)    | 42             | 48             | 57             | 64                         | 57                   |
| Minimum Water Flow (GPM)    | 20             | 20             | 30             | 30                         | 30                   |
| Maximum Water Flow (GPM)    | 70             | 70             | 70             | 80                         | 70                   |
| Weight (lbs)                | 232            | 242            | 252            | 347                        | 260                  |

## DIMENSIONS

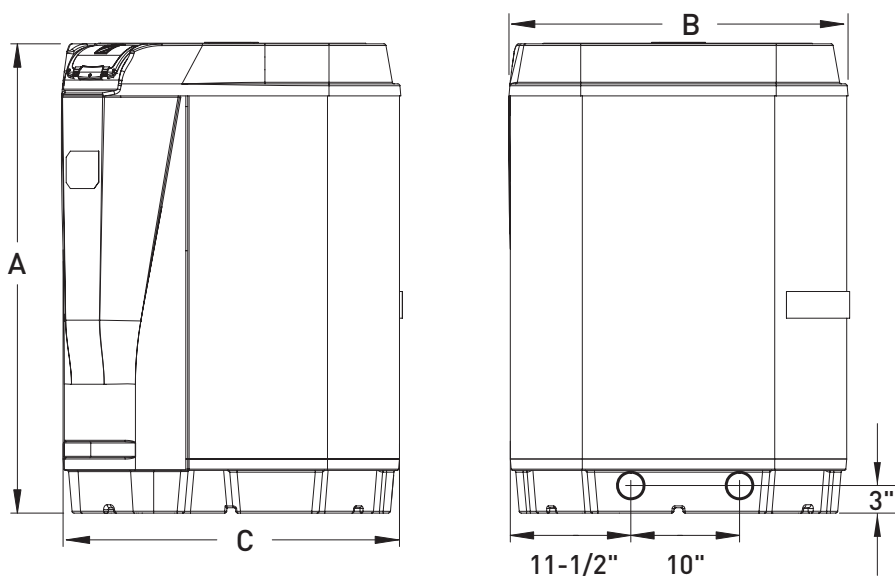

| MODEL     | A   | B   | C   |
|-----------|-----|-----|-----|
| JRT2000R  | 42" | 32" | 32" |
| JRT2500R  | 42" | 32" | 32" |
| JRT3000R  | 45" | 32" | 32" |
| JRT4001R  | 45" | 32" | 32" |
| JRT3000R3 | 45" | 32" | 32" |



A Fluidra Brand | Jandy.com | 1.800.822.7933

©2026 Fluidra. All rights reserved. The trademarks and trade names used herein are the property of their respective owners. Apple and the Apple logo are trademarks of Apple, Inc., registered in the U.S. and other countries. App Store is a service mark of Apple, Inc., registered in the U.S. and other countries. Google Play and Google Play logo are trademarks of Google LLC. All other trademarks are the property of their respective owners. 34267\_SL

TRADE SERIES  
EXCLUSIVE

